


Media Rolls

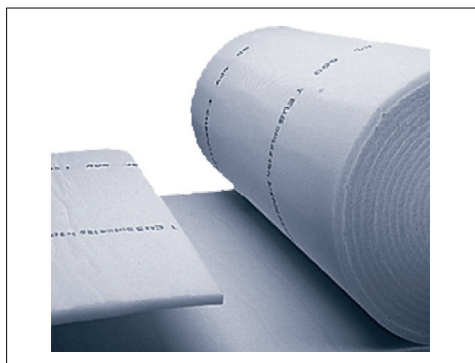

Advantages

- Available for all kind of applications

Application: For use as a pre filter in air conditioning, and spraybooth ventilation.

Media: Synthetic and glass fiber

EN779:2012 efficiency: G2-M5

Arrestance efficiency: 65% - 92%.

Temperature: 80°C - 100°C maximum in continuous service.

Humidity: 100% RH.

Model Name	Characteristics	Width	Length	Filter class	Velocity m/s	Pressure drop	Unit volume m ³	Dust holding g/m ²
Synthetic media								
T15-150		2,05	20	G2	1.5	15	0.53	410
T15-150		1	20	G2	1.5	15	0.26	410
PST 290		2,05	20	G4	1.10	41	0.82	350
PST 290		1	20	G4	1.10	41	0.40	350
PST 290		0,76	20	G4	1.10	41	0.30	350
T15-350		2,05	20	G4	1.5	25	0.62	678
T15-500		2,05	20	G4	1.6	35	0.08	540
POLY 50		2,05	20	G3	1.7	45	2.05	550
POLY SOFT 50		2	10	G3	1.8	52	1.00	673
POLY SOFT 50		2	20	G3	1.9	52	2.00	673
HC - 80		1	50	G2	1.10	12	0.50	360
Glass fiber media								
PR 50		0.710	20	G2	1.8	30	0.71	600
PR 50		0.710	40	G2	1.8	30	1.42	600
PR 50		1.0	20	G2	1.8	30	1.00	600
PR 50		1.0	40	G2	1.8	30	2.00	600
PR 50		1.5	20	G2	1.8	30	1.5	600
PR 50		1.5	40	G2	1.8	30	3.00	600
PR 50		1.829	20	G2	1.8	30	1.829	600
PR 50		2.0	20	G2	1.8	30	2.00	600
PR 50		2.0	30	G2	1.8	30	3.00	600
PR 75		0.71	40	G2	1.8	35	2.13	750
PR 100		0.762	20	G2	1.8	40	1.524	900
PR 100		1.0	20	G2	1.8	40	2.00	900
PR 100		1.0	40	G2	1.8	40	4.00	900
PR 100		1.524	20	G2	1.8	40	3.048	900
PR 100		1.524	40	G2	1.8	40	6.096	900
PR 100		1.829	20	G2	1.8	40	3.658	900
GR50		0.610	40	G3	1.8	35	1.25	700
VK25 White	Impregnated	2	20	G2	2.5	60		700
VK50 White	Impregnated	2	20	G3	2.5	70		1500
VK50 Green	Dry	2	20	G2	1	25		1200
SC600T	Impregnated	2	20	M5	0.25	48		305

Other sizes and cut pads available on request.